




JieFei Bearing Co., Ltd

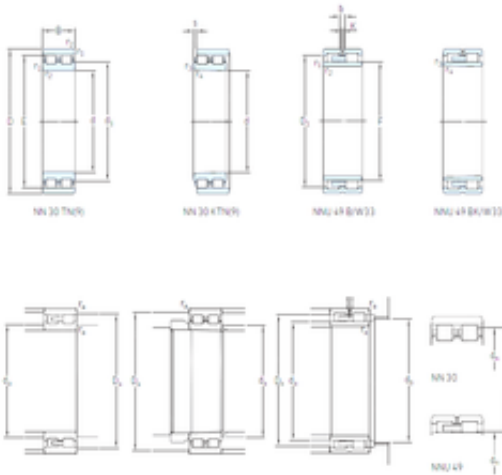

400 mm x 540 mm x 140 mm SKF NNU 4980 B/SPW33 cylindrical roller bearings

Bearing No. NNU 4980 B/SPW33

NNU 4980 B/SPW33 Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|----------------|
| Size | 400x540x140 mm |
| Bore Diameter | 400 mm |
| Outer Diameter | 540 mm |
| Width | 140 mm |
| d | 400 mm |
| D | 540 mm |
| B | 140 mm |
| C | 140 mm |
| b | 16,7 mm |
| r1 min. | 4 mm |
| r2 min. | 4 mm |
| r3 min. | 2,5 mm |
| r4 min. | 2,5 mm |
| D1 | 490,8 mm |
| F | 446 mm |
| K | 9 mm |
| da min. | 415 mm |
| da max | 441 mm |
| Da max. | 524 mm |
| db min | 451 mm |
| ra max. | 3 mm |
| S | 5,5 mm |
| dh | – mm |
| Weight | 87,5 Kg |
| Basic dynamic load rating (C) | 1 470 kN |



JieFei Bearing Co., Ltd

| | |
|--|-------------|
| Basic static load rating (C ₀) | 3 800 kN |
| (Grease) Lubrication Speed | 1 300 r/min |
| (Oil) Lubrication Speed | 1 500 r/min |
| D ₁ | 490.8 mm |
| r _{1,2} min. | 4 mm |
| s max. | 5.5 mm |
| d _a min. | 415 mm |
| d _a max. | 441 mm |
| d _b min. | 451 mm |
| D _a max. | 524 mm |
| r _a max. | 3 mm |
| Basic dynamic load rating C | 1470 kN |
| Basic static load rating C ₀ | 3800 kN |
| Fatigue load limit P _u | 335 kN |
| Attainable speed for grease lubrication | 1300 r/min |
| Attainable speed for oil-air lubrication | 1500 r/min |
| Mass bearing | 88 kg |